

2x4
High Bay
QXHB24

QuickLED® High Bay LED Fixture

Specifications

QXHB24-XX-XXXL40K12-CVWH-XX

Lumens Delivered	12680
Lumen Designation	127L
Input Watts	111.6
Efficacy	114



Color Render (CRI):	85
Color Temperature (CCT):	4000K
Dimming - Full Range:	0 - 10 V
Input Voltage:	110 - 277 VAC
Lumen Maintenance	79% at 60,000 Hours
Dimensions:	L: 46.50" x W: 22.50" x H: 2.75"
Weight:	10.0 lbs
Operating Temperature:	0° - 104° F
Warranty:	5 Year Limited


Key Benefits

QuickLED® Fixtures

Building energy cost reduced up to 50%	Return on investment (ROI) between 1.2 - 3.8 years
High performance: Up to 114 Lumens / Watt	UL, DLC & Lighting facts Certified
Flow Lighting SmartNET LED® system: Upgradable Smart fixtures	Low cost fixture: Utility & other rebates may be available
QuickLED AUTO®: Integrated sensors & secure wireless controls	On-board logic: Energy & building code compliant
Optics: Narrow & wide distribution models	SmartNET LED®: Smart network building systems
Mounting options: Pendant Mount: Cable Mount Conduit Mount	Made in U.S.A ² : Dallas, TX

1 - LED (Korea) | Driver (Taiwan)

Drawings

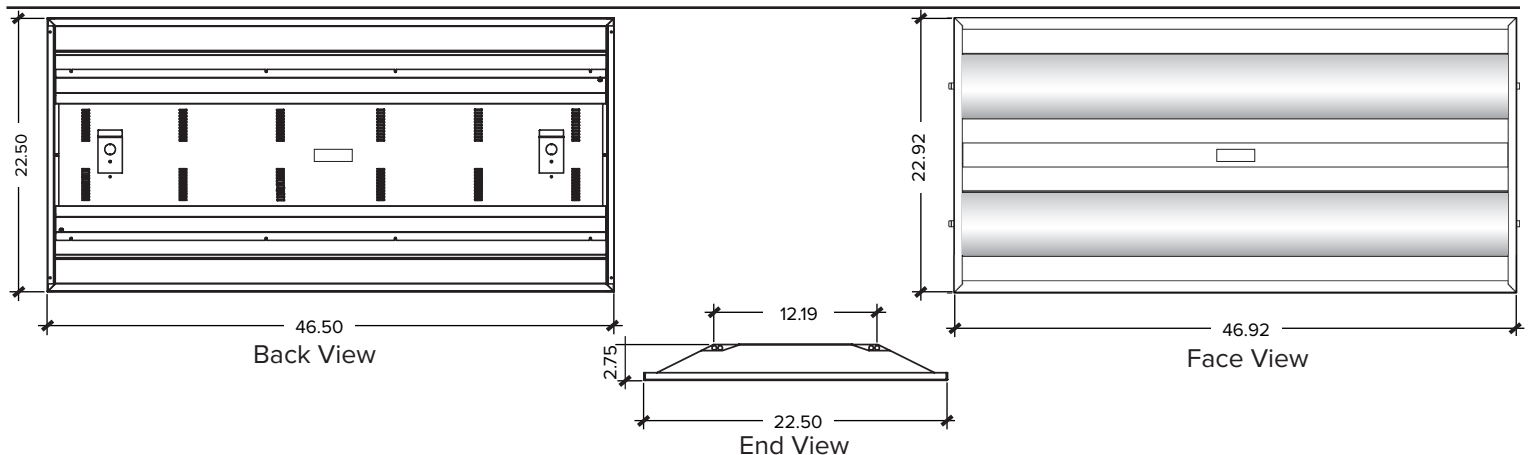

All dimensions are in inches. For a list of detailed dimensions please contact our sales team.

How to Specify & Order

Fixture Specification Process

1	Select product series	Product Definitions
		QuickLED®: Fixtures without integrated sensor control package
		QuickLED AUTO®: Fixtures with integrated sensors & controls with secure wireless (Wi-Fi)
2	Select fixture size	2x4
3	Select mounting option	Pendant Mount*: Cable Mount, Conduit Mount
4	Select lumen designation	See product specification matrix below
5	Select color temperature	4000K
6	Select number of boards	12
7	Select lens type	Convex Lens
8	Select fixture color	White
9	Select version	1
10	Select emergency power	None Emergency Battery Generator / Invertor

*Mounting systems not included unless specified & purchased as an accessory.

Product Specification Matrix (Example shown below)

Product Series	Size	Mounting		Lumen Designation		Color Temperature		Number of Boards		Lens		Fixture Color		Version		Emergency Power			
		Pendant Mount*		12700	127L	4000	40K	12	12	Convex	CV	White	WH	Version	1	None	00		
QuickLED®	QLHB	2x4	24	Pendant Mount*	CA													None	00
QuickLED AUTO®	QAHB			Cable Mount*	CA													Emergency Battery	EB
				Conduit Mount*	CO													Generator Invertor	GI

* Mounting systems are not included unless specified and purchased as an accessory.

Sample 2x4 High Bay Specification

Product Series	Size	Mounting		Lumen Designation		Color Temperature		Number of Boards		Lens		Fixture Color		Version		Emergency Power	
		Cable Mount	CA	12700	127L	4000	40K	12	12	Convex	CV	White	WH	Version	1	None	00
QLHB24		CA		127L40K12				CVWH1				00					

QLHB24-CA-127L40K12-CVWH1-00