

# QuickLED® Linear Curved | Wall

8 LED Boards

## Specifications

QXMD-CXX-XXXL40K08-WRWHX-XX

Lumens Delivered	9416	5419	4385	4145	3733	3069	2741	2450
Lumen Designation	094L	055L	044L	042L	038L	031L	028L	025L
Input Watts	87.4	55.6	43.6	40.7	36.1	30.9	27.1	23.9
Efficacy	108	98	101	102	104	99	101	103



Color Render (CRI):	85
Color Temperature (CCT):	4000K
Dimming - Full Range:	0-10 V <sup>1</sup>
Input Voltage:	110 - 277 VAC
Dimensions:	L: 48.66" x W: 5.36" x H: 4.05"
Weight:	8.0 lbs
Operating Temperature:	0° - 104° F
Warranty:	5 Year Limited

1 - 25D Driver: 1-10 V


## Key Benefits

### QuickLED® Fixtures

Building energy cost reduced up to 50%	Return on investment (ROI) between 1.2 - 3.8 years
QuickLED®: Linear system, extend fixtures end-to-end	Easy to install: Internal wire raceway
High performance: Up to 108 Lumens / Watt	Low cost fixture: Utility & other rebates may be available
Flow Lighting SmartNET LED® system: Upgradable Smart fixtures	On-board logic: Energy & building code compliant
QuickLED AUTO®: Integrated sensors & secure wireless controls	Patent pending "Snap-in" installation: Fast & low cost
Mounting Options: Surface	SmartNET LED®: Smart network building systems
	Made in U.S.A. <sup>2</sup> : Dallas, TX

## Drawings


2 - LED (Korea) | Driver (Taiwan)

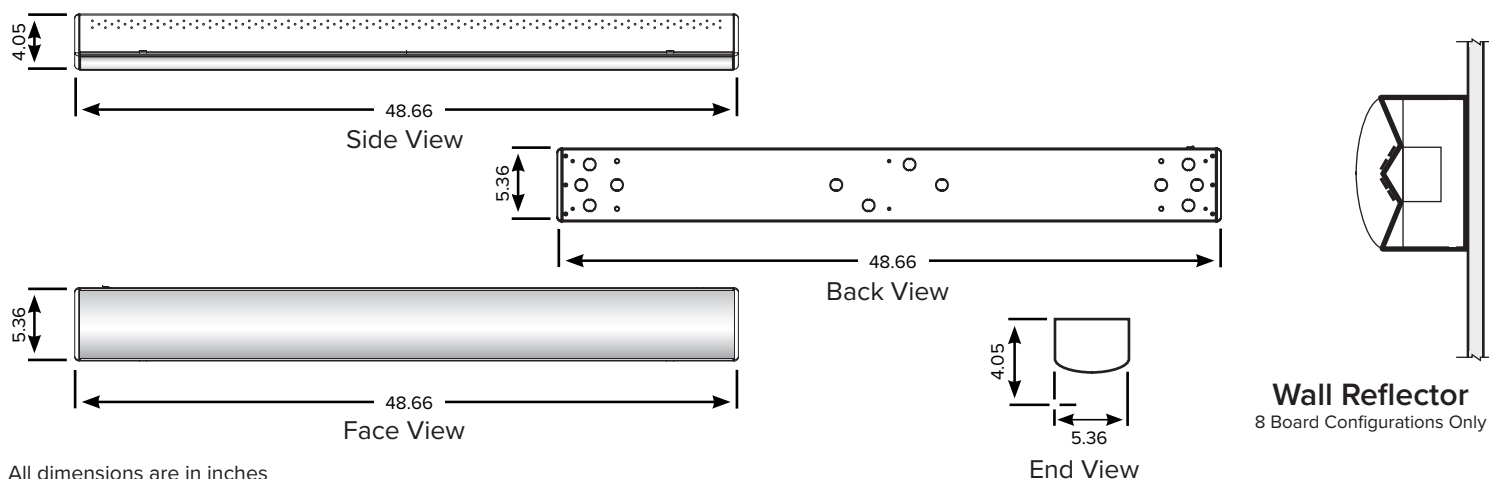

All dimensions are in inches

# How to Specify & Order

## Fixture Specification Process

1	Select product series	Product Definitions
		<b>QuickLED®:</b> Fixtures without integrated sensor control package (Upgradeable)
		<b>QuickLED AUTO®:</b> Fixtures with integrated sensors & controls with secure wireless (Wi-Fi)
2	Select mounting option	Surface Mount*
3	Select lumen designation	See product specification matrix below
4	Color temperature	4000K
5	Select number of board	8
6	Select reflector	WR (Wall reflector  )
		<i>Note: 4-Board and 6-Board fixtures are available with CR reflectors only. 8-Board fixtures are available with WR reflectors only.</i>
7	Select fixture color	White
8	Version	1
9	Select emergency power	None   Emergency Battery   Generator / Invertor

\*Mounting systems not included unless specified & purchased as an accessory.

## Product Specification Matrix


Product Series		Mounting		Lumen Designation		Color Temperature		Number of LED Boards		Reflector Type		Fixture Color		Version		Emergency Power	
QuickLED® Linear Curved	QLMDC	Surface Mount*	SM	9400	094L	4000	40K	8 Boards	08	Wall	WR	White	WH	Version	1	None	00
QuickLED AUTO® Linear Curved*	QAMDC			5500	055L											Emergency Battery	EB
				4400	044L											Generator / Invertor	GI
				4200	042L												
				3800	038L												
				3100	031L												
				2800	028L												
				2500	025L												

### Sensors & Controls

#### Configuration:

1. In every fixture
2. In every other fixture
3. In every 4th fixture

\* Mounting systems are not included unless specified and purchased as an accessory.

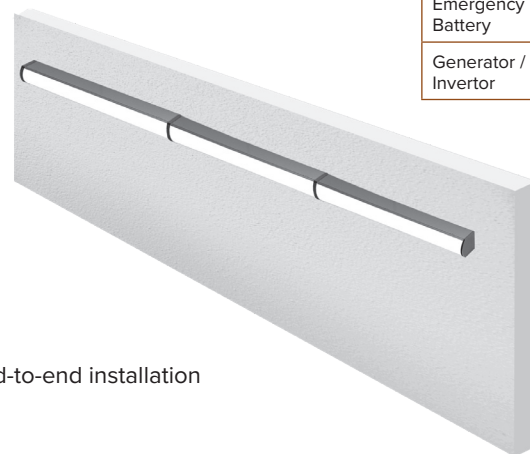

End-to-end installation

## Sample 8-Board Linear Curved Specification

Product Series		Mounting		Lumen Designation		Color Temperature		Number of Boards		Lens		Fixture Color		Version		Emergency Power	
QuickLED® Linear Curved	QLMDC	Surface Mount*	SM	5500	055L	4000	40K	8 Boards	08	Wall	WR	White	WH	Version	1	None	00
<b>QLMDC</b>		<b>SM</b>		<b>055L40K08</b>						<b>WRWH1</b>						<b>00</b>	

**QLMDC-SM-055L40K08-WRWH1-00**